


Recess mounted downlights


Monochrome, sensor-controlled, drill hole Ø: 40 mm



Häfele Loox LED 2028 with motion detector

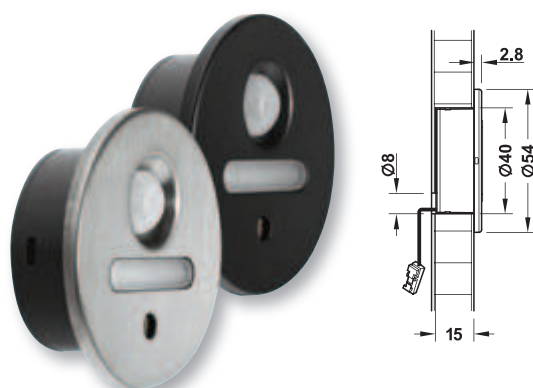

- > Not dimmable
- > Material: Stainless steel, plastic
- > Version: With motion detector active from a decreasing ambient light of 15 lx
- > Energy efficiency class: A+
- > Degree of protection: IP44
- > Delay time: approx. 2 min.
- > Sensor range: 0–3000 mm
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole
- > Drill hole Ø: 40 mm
- > Supplied with: 1 light with 2 m lead, including fixing materials

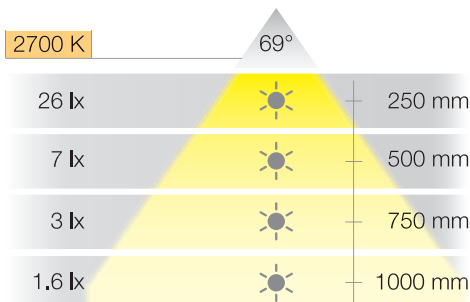

12 V 5 12 V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Black	Matt
V	K	W	lm	lm/W				
12 V	2700	0.3	4	13	90	0.37	833.73.111	833.73.110